SPECIFICATION

Product number: G245AY540-S01

Product type: Bar display





Checked by	Rechecked by	Approved by
Comments	Approved by	Company's seal
	Customer's Name:	

Please send the original back to us after you have approved and signed.

Modify History

Ver.	Page	Revised Descriptions	Date	Revision	Approal
REV.1.0	ALL	ТО	2025.05.16		


Product Paramenter:

	24.5"		Units/N	
Model 24.5		Specifications	umber	Notes
	Dimension	630(L)*198.8(V)*66(W)	MM	
	Shell material	Black fine sand pattern	-	
	Gross Weight	3	Kg/gros s	
Screen Param-eters	Display Size	597.6(L)*168(V)	MM	
	Display- resolution	1920*540	Pixel	
	Brightness	350	Cd/m²	
	Contrast ratio	3000:1	-	
	Display scale	16:4.5	-	
	Viewing angle	89/89/89	-	
	Pixel pitch	0.31125*0.31125	MM	
	Display color	16.7	М	
Ele	Maximum power	≤35	W	
	Standby power	≤1	W	
lectrical	Supply Voltage	5V	V	
	Horn	/	-	
WorkStorage	Operating temperature	0-50	$^{\circ}$	
	Working- humidity	10%~80%	%hr	
	Storage temperature	-20-50	$^{\circ}$	
	Storage Humidity	10%~80%	%hr	
	Power interface	DC 12V 5A		

Copyright GOMANY belongs to GOMANY. The contents of this document are commercial secrets. No organization or individual may copy or disseminate in any form without permission.

Mod	24.5"	Specifications	Units/N umber	Notes
Functional configuration	СРИ	TA40i, quad-core, the highest main frequency is 1.2GHz		
	Operating System	Android 7.1		
	Memory Storage	EMMC is standard with 8G (16/32G optional)		
	built-inROM	2KB EEPROM		
	HDMI Out	1, supports 1080P output		
	HDMI import	/		
	Support Video- Formats	Supports wmv, avi, flv, rm, rmvb,mpeg, ts,mp4, etc		
	Support Image- Formats	Supports BMP, JPEG, PNG, GIF		
	Audio Input/Output	Supports left and right channel output, with built- in dual 4R/20W and 8R/10W power amplifiers		
	Headphone Output	/		
	USB Interface	2 USB HOST, 3 USB ports		
	Serial Port	2 serial TTL sockets, 2 serial RS232 sockets		
	Network Support	4G, Ethernet, support WiFi/ Bluetooth 4.0, wireless peripheral expansion		
	Memory Card	Supports SD cards		
	RTC	Support multi-time timing on and off		
	System Upgrade	Support local SD, USB upgrade		

Product Rendering:

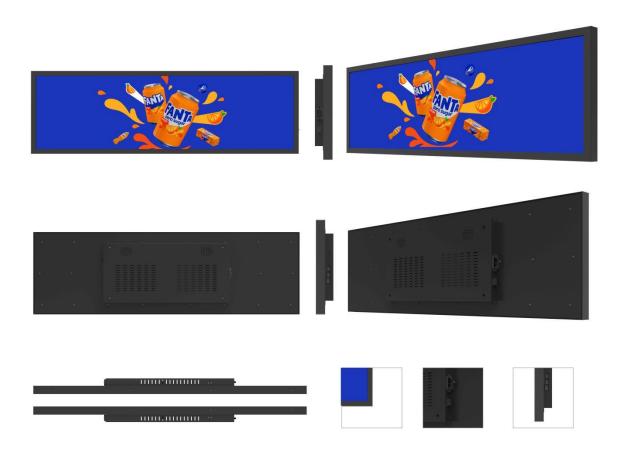

Product Dimension Drawing:

