SPECIFICATION
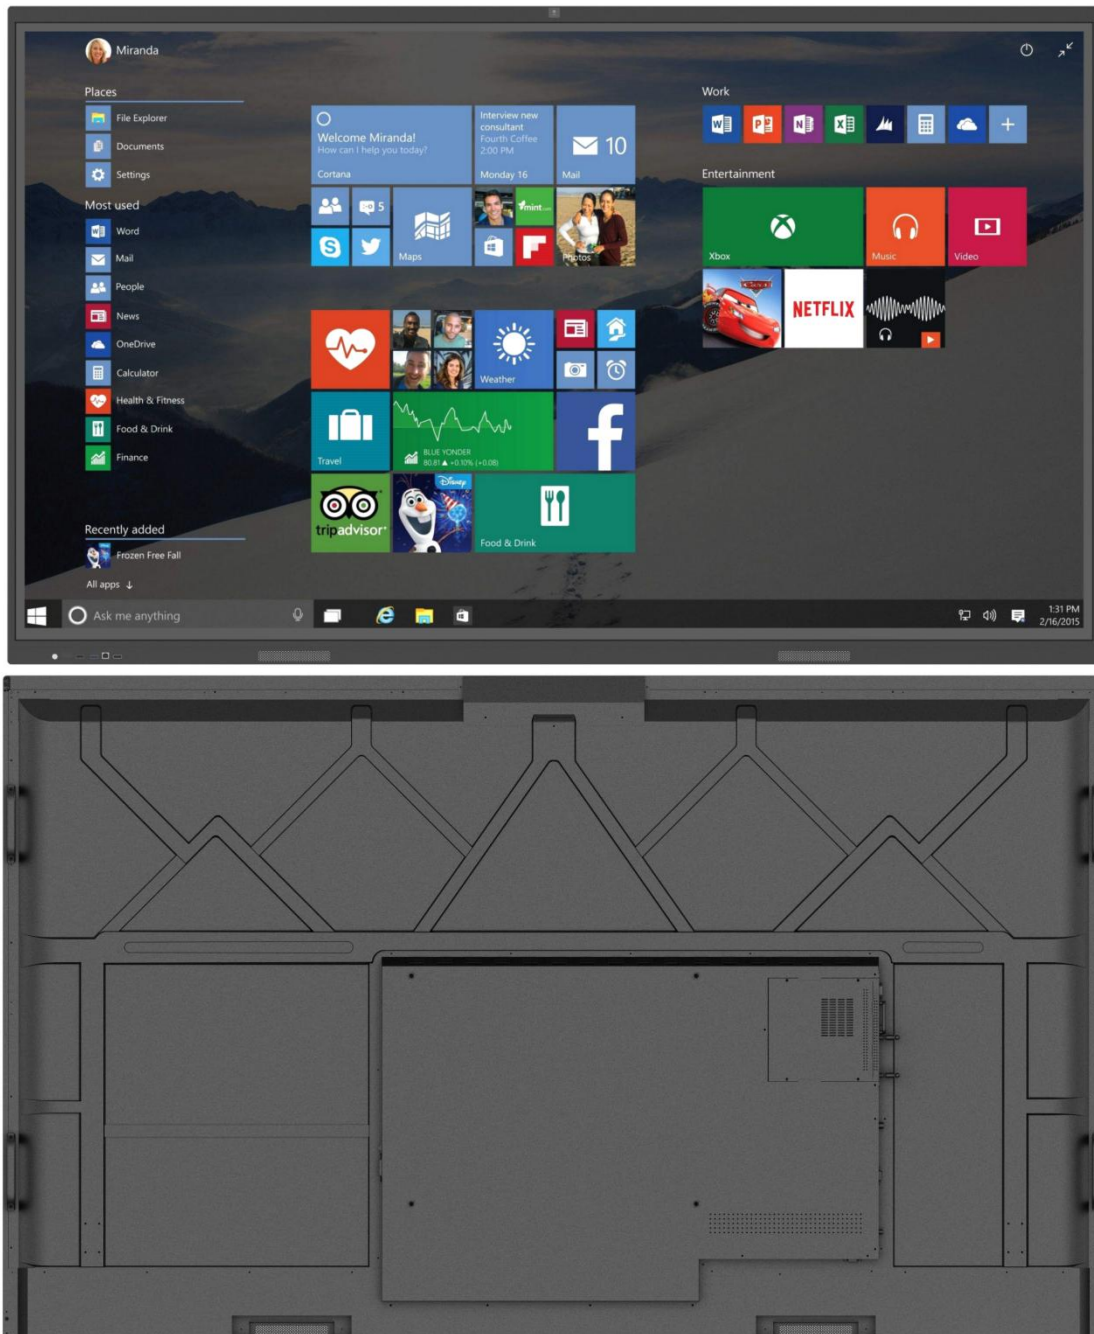
Product number：G750AYN60-D01

Product type：Conference all-in-one machine

	Checked by	Rechecked by	Approved by
	Comments	Approved by	Company's seal
	Customer's Name:		

Please send the original back to us after you have approved and signed.

Modify History

Ver.	Page	Revised Descriptions	Date	Revision	Approal
REV.1.0	ALL	T0	2025.05.16		

Product Paramenter:

Model / 75"		Specifications	Units/Number	Notes
	Dimension	1710（L）*63.5（W）*1037.6（H）	MM	
	Shell material	Aluminum alloy frame, oxidized black	-	
	Gross Weight	54	Kg/gross	
Screen Param-eters	**Display Size**	1652（L)*930(H)	MM	
	Display- resolution	3840（H）×2160（V）	Pixel	
	Brightness	400	Cd/m²	
	Contrast ratio	1200：1	-	
	Display scale	16：9	-	
	Viewing angle	89/89/89/89	-	
	Number of touch points	10		
	Display color	10bit，1.07B	B	
Electrical	**Maximum power**	≤220	W	
	Standby power	≤1	W	
	Supply Voltage	12	V	
	Horn	8Ω3W*2	-	
WorkStorage	**Operating temperature**	0-50	℃	
	Working- humidity	10％～80％	%hr	
	Storage temperature	-20-50	℃	
	Storage Humidity	10％～80％	%hr	
	Power interface	AC 110V~240V		

Model / 75"		Specifications	Units/Number	Notes
Functional configuration	**CPU**	4 core 64-bit high performance CPU, Cortex-A55 main frequency 1.9G(Amlogic T982)		
	Operating System	Android 11		
	Memory Storage	Standard 4GB+32GB, optional 8GB+64GB		
	built-inROM	/		
	HDMI Out	/		
	HDMI import	HDMI IN: 1 group		
	Support Video-Formats	Supports H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other video formats		
	Support Image-Formats	Supports JPG, BMP, PNG and other image formats		
	Audio Input/Output	AV input interface, PC Audio Input		
	Headphone Output	/		
	USB Interface	USB2.0: 3 sets,USB3.0: 1 set		
	Serial Port	RJ45/LAN port: 1 set,RS232 port: 1 set,MIC IN Ports: 1 group,Touch USB: 1 group		
	Network Support	Supports wired LAN and wireless 2.4/5G WIFI network connection		
	Memory Card	/		
	RTC	/		
	System Upgrade	/		

Product Rendering：
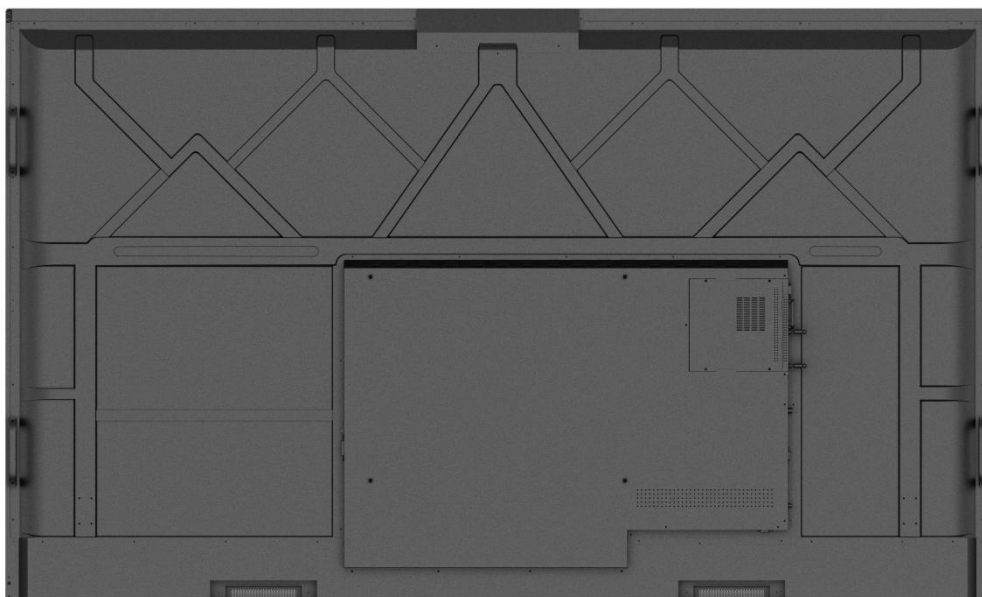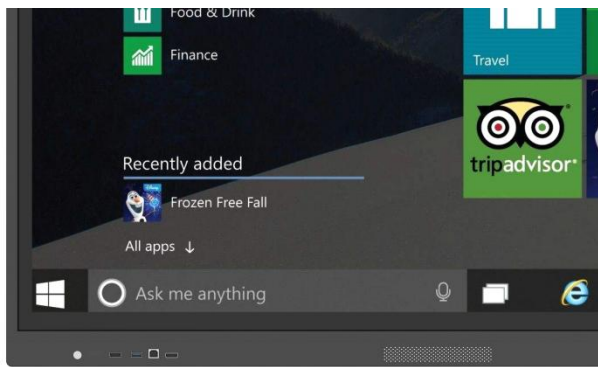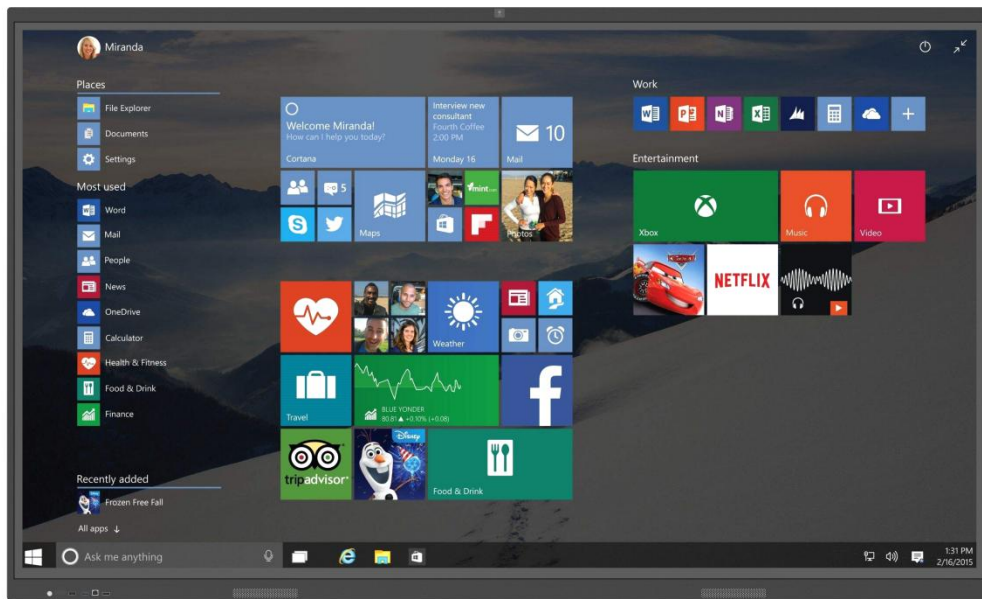
Product Dimension Drawing：

1. Unit: mm
2. Display area: 1652*930mm
3. Resolution: 3840 * 2160
4. Brightness: 400 cd/ ㎡ (TYP)
5. Visual angle: 178 °
6. Storage temperature: –20 ° C~50 ° C Storage humidity: 10-80% RH
7. Working temperature: 0 ° C~50 ° C Working humidity: 10-80% RH
8. Input voltage: AC 110-240V

General tolerance (unit: mm)	F	M							
0~~~200	±0.3	⌄	Model type	G750AYN60-D01		Version	A0	Material	
200~500	±0.5		Part Number			Page	1/1	75″complete machine	
500~800	±0.7		Drawing No						
800~1200	±1.0								
1200~	±1.5		Design		To examine		Ratify		Date

First perspective