SPECIFICATION

Product number：G430AWA80-S01

Product type：Self-service kiosks
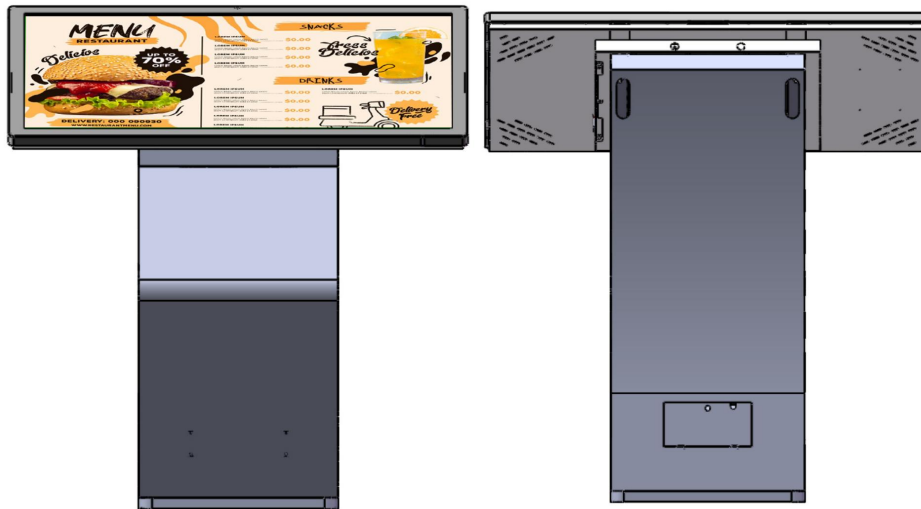
Checked by	Rechecked by	Approved by
Comments	Approved by	Company's seal
Customer's Name:		

Please send the original back to us after you have approved and signed.

Modify History

Ver.	Page	Revised Descriptions	Date	Revision	Approal
REV.1.0	ALL	T0	2025.05.16		

Product Paramenter:

Model / 43"		Specifications	Units/Number	Notes
	Dimension	1011.58（L)*599.82(V)*1103.25(H)	MM	
	Shell material	Black fine sand pattern (customizable)	-	
	Gross Weight	/	Kg/gross	
Screen Param-eters	**Display Size**	940.896(L)×529.254(V)	MM	
	Display- resolution	1920*1080	Pixel	
	Brightness	400	Cd/m²	
	Contrast ratio	1200:1	-	
	Display scale	16:9	-	
	Viewing angle	89/89/89/89	-	
	Pixel pitch	0.49005×0.49005	MM	
	Display color	16.7	M	
Electrical	**Maximum power**	≤65	W	
	Standby power	≤1	W	
	Supply Voltage	12	V	
	Horn	8Ω3W*2	-	
WorkStorage	**Operating temperature**	0-50	℃	
	Working- humidity	10％～80％	%hr	
	Storage temperature	-20-50	℃	
	Storage Humidity	10％～80％	%hr	
Power interface		AC 110-240V		

Model / 43"		Specifications	Units/Number	Notes
Functional configuration	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1		
	Operating System	Android 5.1.1		
	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)		
	built-inROM	2KB EEPROM (default not included, optional patch)		
	HDMI Out	1, supports 1080P@120Hz, 4kx2k@60Hz output		
	HDMI import	/		
	Support Video-Formats	Support wmv, avi, flv, rm, rmvb,mpeg,ts,mp4, etc		
	Support Image-Formats	Supports BMP, JPEG, PNG, GIF		
	Audio Input/Output	Supports left and right channel output, with built-in dual 4R/20W and 8R/10W power amplifiers		
	Headphone Output	Supports the insertion of one or two earphones		
	USB Interface	2 * USB HOST		
	Serial Port	/		
	Network Support	10/100M Adaptive Ethernet，Built-in WIFI, BT4.0，Built-in PCI-E interface 3G/4G, Internet access and call		
	Memory Card	Supports		
	RTC	Supports		
	System Upgrade	Support local SD, USB upgrade		

Product Rendering：

1011.58

1103.25

599.82

818.07

28.51°

470

440

1. Unit: mm
2. Resolution: 1920* 1080
3. Brightness: 400 cd/ ㎡ (TYP)
4. Visual angle: 178 °
5. Storage temperature: −20 ° C˜50 ° C Storage humidity: 10-80% RH
6. Working temperature: 0 ° C˜50 ° C Working humidity: 10-80% RH
7. Input voltage: AC 110-240V

First perspective

General tolerance (unit: mm)	F	M	Model type	G430AWA80-S01		Version	A0	Material	
0----200	±0.3		Part Number			Page	1/1	43″complete machine	
200—500	±0.5								
500—800	±0.7		Drawing No						
800—1200	±1.0								
1200—	±1.5		Design		To examine		Ratify		Date