

TABLE OF CONTENTS

Products List	02
Bus display solution	
28.6 inches rail transit	03
Feature image	03
Application image	03
Specifications	03
38 inches rail transit	04
Feature image	04
Application image	04
Specifications	04
Metro display solution	
36.6 inches rail transit	05
Feature image	05
Application image	05
Specifications	05
43 inches rail transit	06
Feature image	06
Application image	06
Specifications	06
86 inches rail transit	07
Feature image	07
Application image	07
Specifications	07

Shenzhen Gomany Display Co.,Ltd.

Products List

Model	Dimension (L*W*H) MM	Display area (L*W) MM	Resolution (Pixel)	Brightness (Cd/m²)	Power (W)	Weight (Kg)
28.6"	788*282*71.8	698.4*196.43	1920*540	500	≤45	/
38"	958*300*55	919.3*258.6	1920*540	400	≤50	/
36.6"	1059.5*182.8*21.7	919.3*138.85	1920*290	700	≤80	/
43"	1122.5*239*27	1073.78*201.1	1920*158	700	≤80	/
86"	2185.5*366*68	2158.84*334.51	3840*600	500	≤180	/

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image




Specifications

Model	28.6	Power interface	DC 24V 5A
Dimension	788 (L)*282(V)*71.8(W) MM	CPU	TA40i , quad, highest main frequency1.2GHz
Material	Creamy white	System	Android 7.1
Weight	7.7 Kg	Memory	EMMC 8G, (16/32G)
Display area	698.4 (L)*196.43(V) MM	Built-in ROM	2KB EEPROM
Resolution	1920*540 Pixel	HDMI output	1 piece, 1080P output
Brightness	500 Cd/m ²	HDMI-IN	/
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv etc
Max power consumption	≤45 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤1 W	Audio in/out	Left and right channel output, built-in dual 4R/20W, 8R/10W
Supply voltage	12V V	Headphone out	/
Speaker	/	USB interface	2 USB HOST、 3 USB sockets
Work temp	0-50 °C	Serial port	2 TTL sockets, 2 RS232 sockets
Work humidity	10% ~ 60% %hr	Network	4G、 ethernet、 WiFi/bluetooth 4.0、 wireless peripheral extender
Storage temp	-20-60 °C	Memory card	SD
Storage humidity	10% ~ 60% %hr	System upgrade	local SD , USB upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image

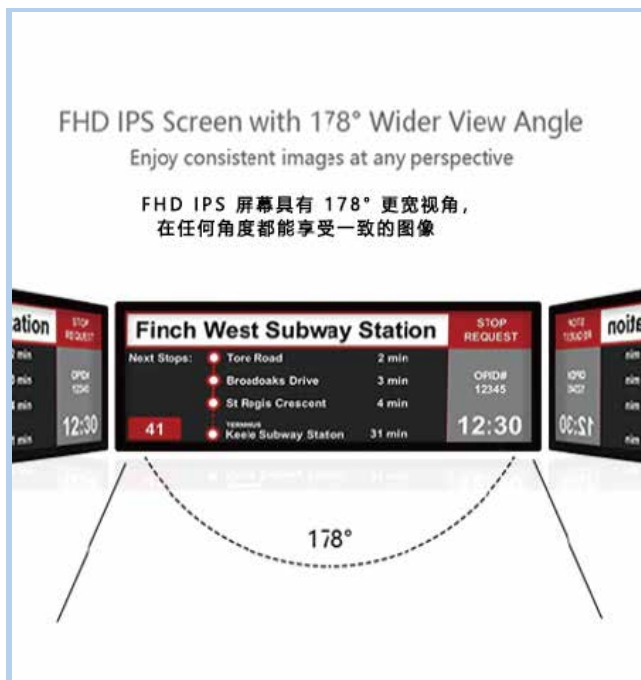

Application image



Specifications


Model	38"	Power interface	DC 24V 5A
Dimension	958 (L)*300(V)*55(W) MM	CPU	A40i, quad, highest main frequency 1.2GHz
Material	Black fine sand pattern	System	Android 7.1
Weight	/ Kg	Memory	EMMC 8G, (16/32G)
Display area	919.3 (L)*258.6(V) MM	Built-in ROM	2KB EEPROM
Resolution	1920*540 Pixel	HDMI output	1080P output
Brightness	400 Cd/m ²	HDMI-IN	/
Contrast	1000:1	Video format	wmv, avi, flv, rm, rmvb, mpeg, ts, mp4 etc
Max power consumption	≤50 W	Picture format	BMP, JPEG, PNG, GIF
Standby power	≤5 W	Audio in/out	Left and right channel, built-in dual 4R/20W, 8R/10W
Supply voltage	12V V	Headphone out	3.5mm standard interface
Speaker	/	USB interface	2 USB hosts, 3 USB sockets
Work temp	0-50 °C	Serial port	2 TTL sockets, 2 RS232 sockets
Work humidity	20% ~ 90% %hr	Network	10M/100M adaptive ethernet
Storage temp	-20-60 °C	Memory card	SD
Storage humidity	10% ~ 90% %hr	System upgrade	Local USB upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image

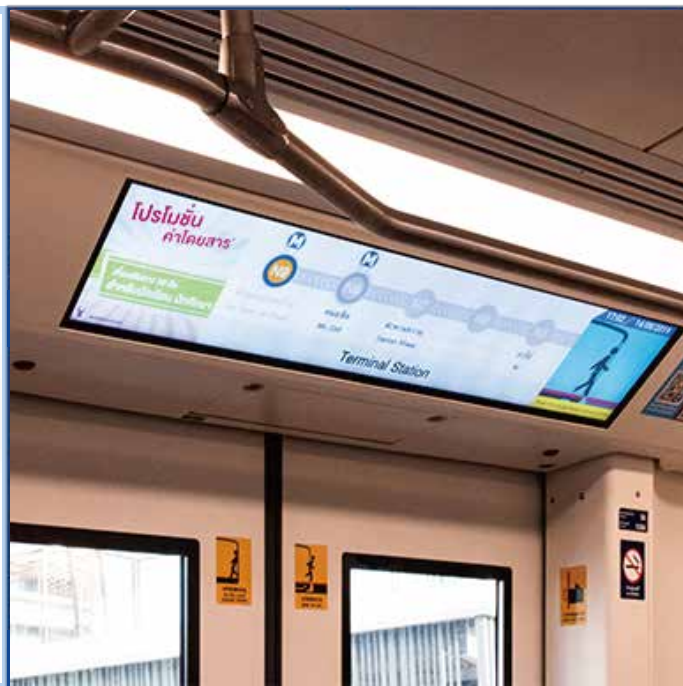

Specifications

Model	36.6"	Power interface	DC 110V
Dimension	1059.5 (L)*182.8 (V)*21.7(W) MM	CPU	T3
Material	Black fine sand pattern	System	Android 7.1/linux3.10.0
Weight	/ Kg	Memory	EMMC 8G,(16/32G)
Display area	919.3 (L)*138.85 (V) MM	Built-in ROM	2GBB EEPROM
Resolution	1920*290 Pixel	HDMI output	/
Brightness	700 Cd/m ²	HDMI-IN	/
Contrast	4000:1	Video format	wmv、avi、flv、rm、rmvb、mpeg、ts、mp4 etc
Max power consumption	≤80 W	Picture format	BMP、JPEG、PNG、GIF
Standby power	≤5 W	Audio in/out	/
Supply voltage	12V V	Headphone out	/
Speaker	/	USB interface	USB2.0 OTG/USB HOST
Work temp	0-50 °C	Serial port	/
Work humidity	20% ~ 90% %hr	Network	MII、RMII 和 RGMII 支持 10 / 100 / 1000Mbps
Storage temp	-20-60 °C	Memory card	SD
Storage humidity	10% ~ 90% %hr	System upgrade	USB/network/SD

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	43.1"	Power interface	DC 110V
Dimension	1122.5 (L)*239(V)*27(W) MM	CPU	T3
Material	Black fine sand pattern	System	Android 7.1/linux3.10.0
Weight	/ Kg	Memory	EMMC 8G,(16/32G)
Display area	1073.78 (L)*201.1(V) MM	Built-in ROM	2GBB EEPROM
Resolution	1920*360 Pixel	HDMI output	/
Brightness	700 Cd/m ²	HDMI-IN	/
Contrast	3000:1	Video format	wmv、avi、flv、rm、rmvb、mpeg、ts、mp4 etc
Max power consumption	≤80 W	Picture format	BMP、JPEG、PNG、GIF
Standby power	≤5 W	Audio in/out	/
Supply voltage	12V V	Headphone out	/
Speaker	/	USB interface	USB2.0 OTG/USB HOST
Work temp	0-50 °C	Serial port	/
Work humidity	20% ~ 90% %hr	Network	MII、RMII 和 RGMII 支持 10 / 100 / 1000Mbps
Storage temp	-20-60 °C	Memory card	SD
Storage humidity	10% ~ 90% %hr	System upgrade	USB/network/SD

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	86"	Power interface	AC 110-240V
Dimension	2185.5 (L)*366(V)*68(W) MM	CPU	/
Material	Black fine sand pattern	System	/
Weight	42 Kg	Memory	/
Display area	2158.84 (L)*334.51(V) MM	Built-in ROM	/
Resolution	3840*600 Pixel	HDMI output	2 channels HDMI 2.0 input
Brightness	500 Cd/m ²	HDMI-IN	/
Contrast	1200:1	Video format	wmv、avi、flv、rm、rmvb、mpeg、ts、mp4 etc
Max power consumption	≤180 W	Picture format	BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	8Ω) 2 X 10W
Supply voltage	12V V	Headphone out	/
Speaker	5W/8Ω	USB interface	USB: 1*TV-USB, 1*OPS-3.0USB, 1*OPS-2.0USB (built-in)
Work temp	0-50 °C	Serial port	/
Work humidity	10% ~ 60% %hr	Network	/
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 60% %hr	System upgrade	Local Debug upgrade