

TABLE OF CONTENTS

Product List 02

Square screen product series

19.2" square screen 03

Rendering 03
Application scenario diagram 03
Product Parameters 03

26" square screen 04

Rendering 04
Application scenario diagram 04
Product Parameters 04

33" square screen 05

Rendering 05
Application scenario diagram 05
Product Parameters 05

39" square screen 06

Rendering 06
Application scenario diagram 06
Product Parameters 06

45" square screen 07

Rendering 07
Application scenario diagram 07
Product Parameters 07

52" square screen 08

Rendering 08
Application scenario diagram 08
Product Parameters 08

59" square screen 09


Rendering 09
Application scenario diagram 09
Product Parameters 09

Shenzhen Gomany Display Co., Ltd.


Product List						
Model	Dimension (长*宽*厚) MM	Display area (长*宽)MM	Pixel pitch (Pixel)	Brightness (Cd/m²)	Power (W)	Weight (Kg)
19.2"	369.6*369.6*38.4	340.4*340.4	936*936	350	≤50	6.8
26"	512*512*36.4	460.7*460.7	1880*1880	300	≤50	8.8
33"	617*617*31	592.2*592.2	1880*1880	300	≤50	9.2
39"	730*730*60	699.4*699.4	1880*1880	350	≤120	11
45"	837*837*47	807*807	1880*1880	500	≤120	15
52"	965.2*965.2*65	927.78*927.78	1880*1880	500	≤280	19
59"	1090*1090*46	1056.93*1056.93	1880*1880	300	≤200	25

Shenzhen Gomany Display Co., Ltd. 19.2"

Rendering

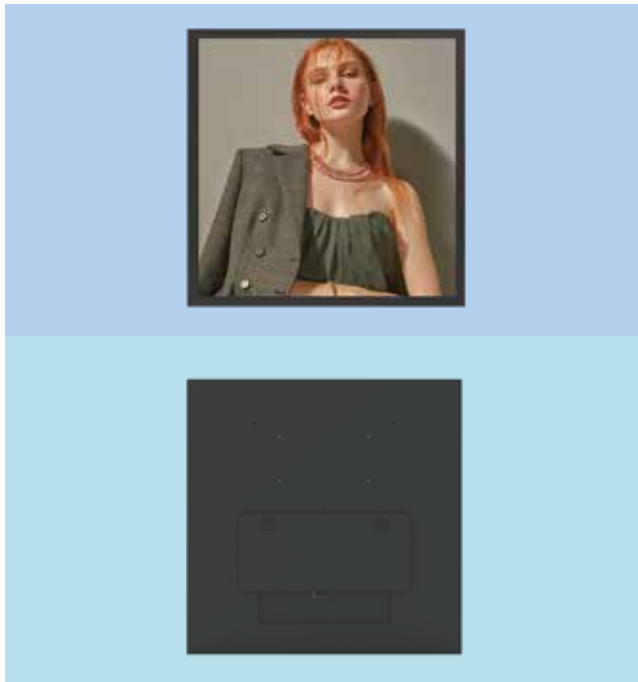

Application scenario diagram

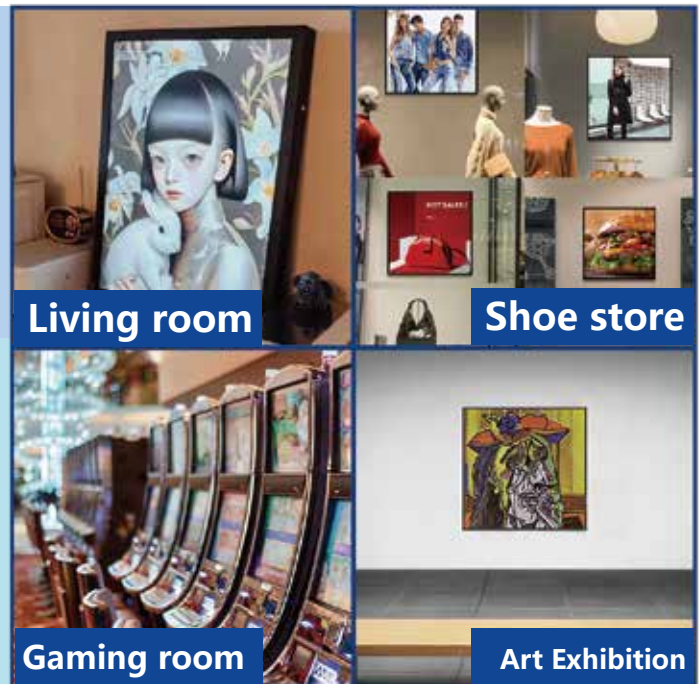

Product Parameters

Model	19.2"	Power interface	DC 12V 5A
Dimension	369.6 (L)*369.6(V)*38.4(W) MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture	Operating System	Android 5.1.1
Weight	6.8 Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	340.4(L)*340.4(V) MM	Built-inROM	/
Display-resolution	936*936 Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	350 Cd/m ²	HDMI-IN	/
Contrast ratio	4000:1	Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤50 W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤1 W	Audio Input/Output	support Left and right channel output, built-in dual 4R/20W, 8R/10W
Supply Voltage	12V power supply V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω	USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50 °C	Serial Port	4 个 Serial port socket (2 个 TTL+2 个 232), Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80% %hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50 °C	Memory Card	SD card support
Storage Humidity	10% ~ 80% %hr	System Upgrade	Support local SD USB upgrade

Shenzhen Gomany Display Co., Ltd. 26"

Rendering



Application scenario diagram



Product Parameters

Model	26"	Power interface	DC 12V 5A
Dimension	512 (L)*512(V)*36.4(W) MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture	Operating System	Android 5.1.1
Weight	8.8 Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	460.7(L)*460.7(V) MM	Built-inROM	/
Display-resolution	1880*1880 Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	300 Cd/m ²	HDMI-IN	/
Contrast ratio	5000:1	Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤50 W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤1 W	Audio Input/Output	supportLeft and right channel output, built-in dual 4R/20W,8R/10W
Supply Voltage	12V power supply V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω	USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50 °C	Serial Port	4 个Serial port socket(2 个 TTL+2 个 232),Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80% %hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50 °C	Memory Card	SD card support
Storage Humidity	10% ~ 80% %hr	System Upgrade	Support local SD USB upgrade

Rendering




Application scenario diagram



Product Parameters

Model	33"	Power interface	DC 12V 5A
Dimension	617 (L)*617(V)*31(W) MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture	Operating System	Android 5.1.1
Weight	9.2 Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	592.2(L)*592.2(V) MM	Built-inROM	/
Display-resolution	1880*1880 Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	300 Cd/m ²	HDMI-IN	/
Contrast ratio	1200:1	Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤50 W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤1 W	Audio Input/Output	supportLeft and right channel output, built-in dual 4R/20W,8R/10W
Supply Voltage	12V power supply V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω	USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50 °C	Serial Port	4 个Serial port socket(2 个 TTL+2 个 232),Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80% %hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50 °C	Memory Card	SD card support
Storage Humidity	10% ~ 80% %hr	System Upgrade	Support local SD USB upgrade

Rendering

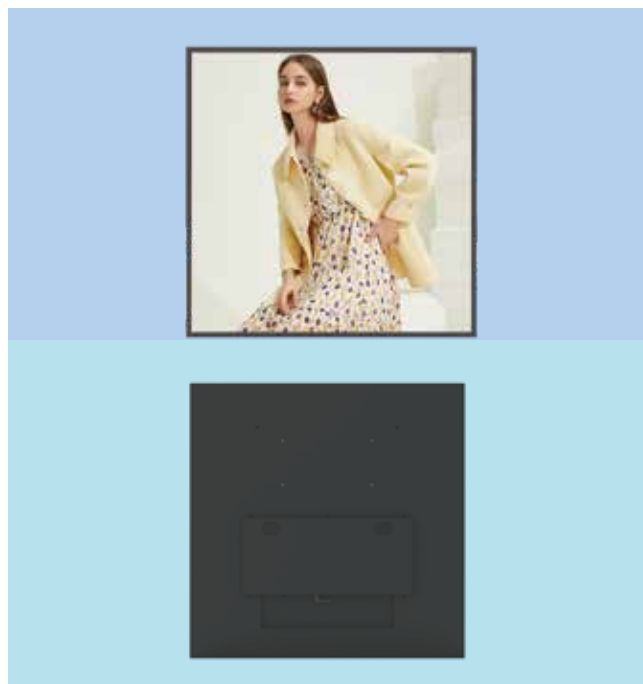

Application scenario diagram



Product Parameters

Model	39"		Power interface	AC 110-240V
Dimension	730 (L)*730(H)x60(W)	MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture		Operating System	Android 5.1.1
Weight	11	Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	699.4(L)x 699.4(V)	MM	Built-inROM	/
Display-resolution	1880*1880	Pixel	HDMI Out	1 ↑,support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	350	Cd/m ²	HDMI-IN	/
Contrast ratio	5000:1		Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤120	W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤4.5	W	Audio Input/Output	supportLeft and right channel output, built-in dual 4R/20W,8R/10W
Supply Voltage	12V power supply	V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω		USB Interface	2 ↑ USB HOST、5 ↑ USB socket
Operation temperature	0-50	°C	Serial Port	4 ↑Serial port socket(2 ↑ TTL+2 ↑ 232),Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80%	%hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50	°C	Memory Card	SD card support
Storage Humidity	10% ~ 80%	%hr	System Upgrade	Support local SD USB upgrade

Shenzhen Gomany Display Co., Ltd. 45"

Rendering




Application scenario diagram




Product Parameters

Model	45"		Power interface	AC 110-240V
Dimension	837 (L)*837(H)x47(W)	MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture		Operating System	Android 5.1.1
Weight	15	Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	807(L)x807(V)	MM	Built-inROM	/
Display-resolution	1880*1880	Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	500	Cd/m ²	HDMI-IN	/
Contrast ratio	1200:1		Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤120	W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤4.5	W	Audio Input/Output	support Left and right channel output, built-in dual 4R/20W, 8R/10W
Supply Voltage	12V power supply	V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω		USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50	°C	Serial Port	4 个 Serial port socket (2 个 TTL+2 个 232), Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80%	%hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50	°C	Memory Card	SD card support
Storage Humidity	10% ~ 80%	%hr	System Upgrade	Support local SD USB upgrade

Rendering

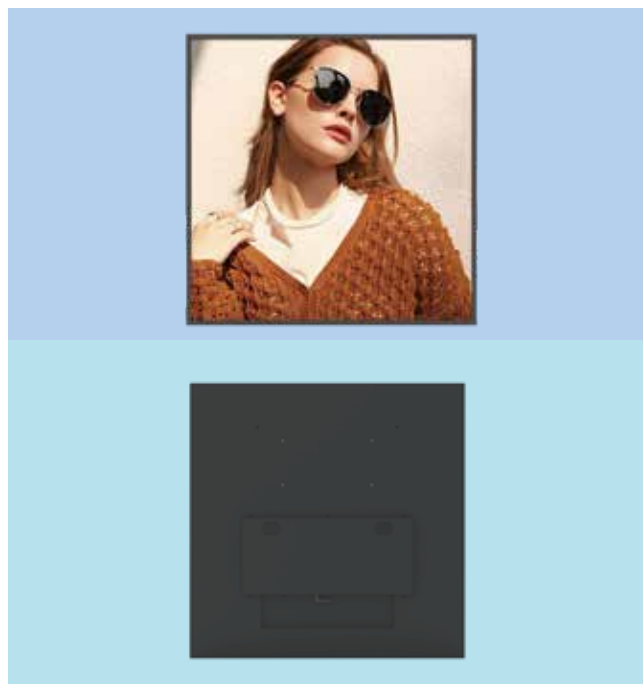

Application scenario diagram

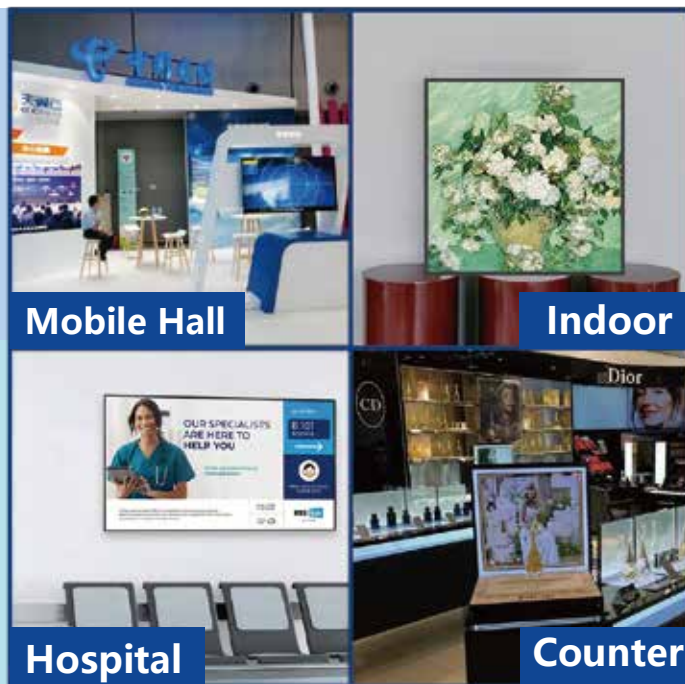


Product Parameters

Model	52"	Power interface	AC 1110-240V
Dimension	965.2 (L)*965.2(H)x65(W) MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture	Operating System	Android 5.1.1
Weight	19 Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	927.78(L)x 927.78(V) MM	Built-inROM	/
Display-resolution	1880*1880 Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	500 Cd/m ²	HDMI-IN	/
Contrast ratio	1200:1	Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤280 W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio Input/Output	supportLeft and right channel output, built-in dual 4R/20W,8R/10W
Supply Voltage	12V power supply V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω	USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50 °C	Serial Port	4 个Serial port socket(2 个 TTL+2 个 232),Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80% %hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50 °C	Memory Card	SD card support
Storage Humidity	10% ~ 80% %hr	System Upgrade	Support local SD USB upgrade

Shenzhen Gomany Display Co., Ltd. 59"

Rendering

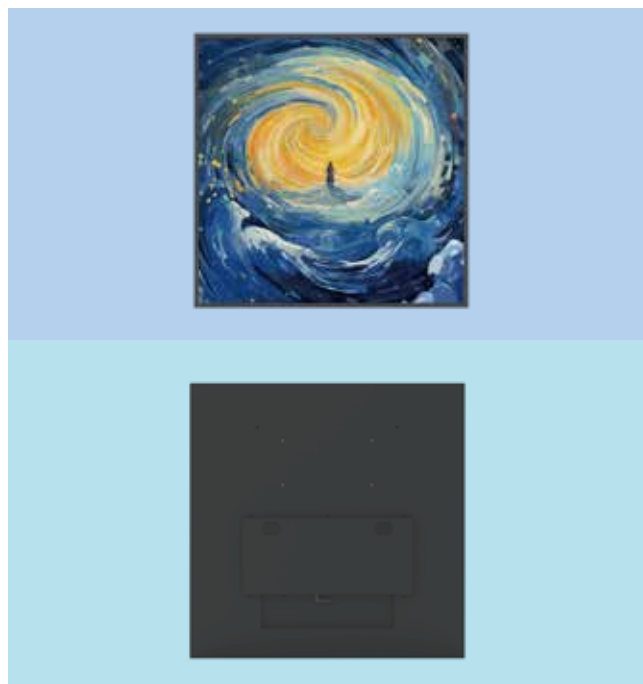

Application scenario diagram



Product Parameters

Model	59"	Power interface	AC 110-240V
Dimension	1090 (L)*1090(H)x46(W) MM	CPU	RK3288, quad-core, 1.8GHz, Android 5.1.1
Shell material	Black fine sand texture	Operating System	Android 5.1.1
Weight	25 Kg	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)
Display area	1056.93(L)x 1056.93(V) MM	Built-inROM	/
Display-resolution	1880*1880 Pixel	HDMI Out	1 个, support 1080P@120Hz, 4kx2k@60Hz Output
Brightness	300 Cd/m ²	HDMI-IN	/
Contrast ratio	1200:1	Support Video-Formats	support wmv、avi、flv、rm、rmvb、mpeg、ts、
Maximum power	≤200 W	Support Image-Formats	support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio Input/Output	supportLeft and right channel output, built-in dual 4R/20W,8R/10W
Supply Voltage	12V power supply V	Headphone Output	Support one-way three/four-band headphone insertio
Horn	3W/8Ω	USB Interface	2 个 USB HOST、5 个 USB socket
Operation temperature	0-50 °C	Serial Port	4 个Serial port socket(2 个 TTL+2 个 232),Bluetooth multiplexed serial port include
Working-humidity	10% ~ 80% %hr	Network Support	Ethernet: WIFI
Storage temperature	-20-50 °C	Memory Card	SD card support
Storage Humidity	10% ~ 80% %hr	System Upgrade	Support local SD USB upgrade