

TABLE OF CONTENTS

Products List	02
---------------------	----

Floor-standing: 70/80/90inch

70" full screen	03
-----------------------	----

Feature images	03
----------------	----

Application images	03
--------------------	----

Specifications	03
----------------	----

80" full screen	04
-----------------------	----

Feature images	04
----------------	----

Application images	04
--------------------	----

Specifications	04
----------------	----

90" full screen	05
-----------------------	----

Feature images	05
----------------	----

Application images	05
--------------------	----

Specifications	05
----------------	----

Portable : 70/80/90inch

70" full screen	06
-----------------------	----

Feature images	06
----------------	----

Application images	06
--------------------	----

Specifications	06
----------------	----

80" full screen	07
-----------------------	----

Feature images	07
----------------	----

Application images	07
--------------------	----

Specifications	07
----------------	----

90" full screen	08
-----------------------	----

Feature images	08
----------------	----

Application images	08
--------------------	----

Specifications	08
----------------	----

Wall mounted style: 70/80/90inch

70" full screen	09
-----------------------	----

Feature images	09
----------------	----

Application images	09
--------------------	----

Specifications	09
----------------	----

80" full screen	10
-----------------------	----

Feature images	10
----------------	----

Application images	10
--------------------	----

Specifications	10
----------------	----

90" full screen	11
-----------------------	----

Feature images	11
----------------	----

Application images	11
--------------------	----

Specifications	11
----------------	----

Shenzhen Gomany Display Co.,Ltd.

Products List

Model	Dimension (L*W*H) MM	Display area (L*W) MM	Resolution (Pixel)	Brightness (Cd/m²)	Power (W)	Weight (Kg)
Floor-standing: 70"	1780.6*680.6*74	1649.66*618.62	3840*1440	350	≤70	/
Floor-standing: 80"	2026*772*74	1895.04*710.64	3840*1440	350	≤70	/
Floor-standing: 90"	2290*871*74.1	2158.85*809.568	3840*1440	350	≤70	/
Portable: 70"	1781*680.6*31	1649.66*618.624	3840*1440	500	≤200	/
Portable: 80"	2026*772*75	1895.04*710.64	3840*1440	500	≤200	/
Portable: 90"	2290*871*75	2158.85*809.56	3840*1440	500	≤200	/
Wall mounted style: 90"	1781*680.6*31	1649.66*618.624	3840*1440	500	≤200	/
Wall mounted style: 90"	2026*772*75	1895.04*710.64	3840*1440	500	≤200	/
Wall mounted style: 90"	2290*871*75	2158.85*809.568	3840*1440	500	≤200	/

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	70"	Power interface	AC 110-240V
Dimension	1780.6 (L)*680.6(V)*74(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	1649.66 (L)*618.62(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	350 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤70 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	80"	Power interface	AC 110-240V
Dimension	2026 (L)*772(V)*74(W)	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/	Memory	Standard 16GB (16/32/64GB optional)
Display area	1895.04 (L)*710.64(V)	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440	HDMI output	/
Brightness	350	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤70	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V	Headphone out	Support 1 headphone jack
Speaker	5W/8Ω*2	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55	Serial port	1 available serial port
Work humidity	10% ~ 90%	Network	WIFI, Ethernet
Storage temp	-20-60	Memory card	/
Storage humidity	10% ~ 90%	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	90"	Power interface	AC 110-240V
Dimension	2290 (L)*871(V)*74.1(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	2158.85 (L)*809.568 (V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	350 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤70 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	5W/8Ω*2	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image




Specifications

Model	70"	Power interface	AC 110-240V
Dimension	1781 (L)*680.6(V)*31(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	1649.66 (L)*618.624(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image

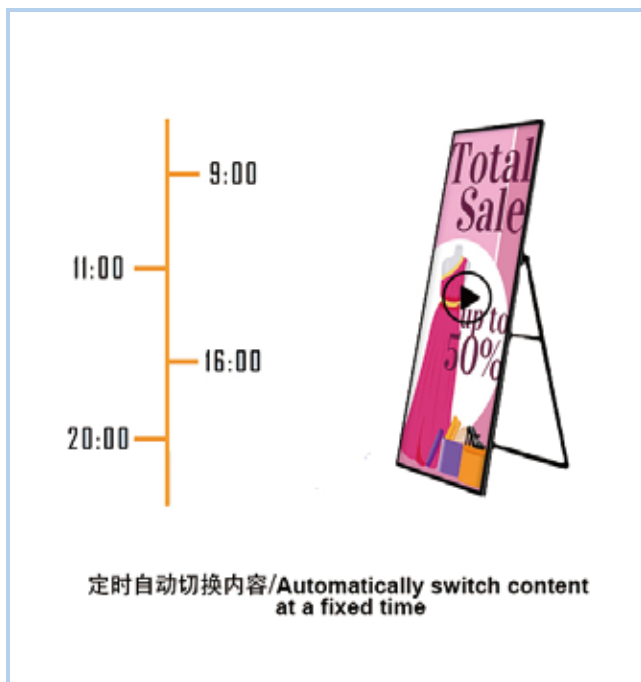

Application image



Specifications

Model	80"	Power interface	AC 110-240V
Dimension	2026 (L)*772(V)*75(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	1895.04 (L)*710.64(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	90"	Power interface	AC 110-240V
Dimension	2290 (L)*871(V)*75(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	2158.85 (L)*809.568(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	70"	Power interface	AC 110-240V
Dimension	1781 (L)*680.6(V)*31(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	1649.66 (L)*618.624(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	80"	Power interface	AC 110-240V
Dimension	2026 (L)*772(V)*75(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	2158.85 (L)*809.568(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	10% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade

Shenzhen Gomany Display Co.,Ltd.

Feature image



Application image



Specifications

Model	90"	Power interface	AC 110-240V
Dimension	2290 (L)*871(V)*75(W) MM	CPU	T972 quad-core A55, up to 1.9GHz
Material	Black fine sand pattern	System	Android 9.0
Weight	/ Kg	Memory	Standard 16GB (16/32/64GB optional)
Display area	2158.85 (L)*809.568(V) MM	Built-in ROM	Standard 2GB (1G/4G optional)
Resolution	3840*1440 Pixel	HDMI output	/
Brightness	500 Cd/m ²	HDMI-IN	1, supports HDMI 2.1 4kx2k@60Hz input
Contrast	1200:1	Video format	Support mp4,mkv,wmv,mov,flv,etc.
Max power consumption	≤200 W	Picture format	Support BMP、JPEG、PNG、GIF
Standby power	≤4.5 W	Audio in/out	Support left and right channel output, built-in dual 8Ω/9.5W power
Supply voltage	12V V	Headphone out	Support 1 headphone jack
Speaker	/	USB interface	1 USB OTG A port, 1 USB2.0 A port, 2 USB sockets
Work temp	0-55 °C	Serial port	1 available serial port
Work humidity	10% ~ 90% %hr	Network	WIFI, Ethernet
Storage temp	-20-60 °C	Memory card	/
Storage humidity	5% ~ 90% %hr	System upgrade	Support local TF, USB upgrade and remote upgrade