SPECIFICATION

Product number：G190AWA24-S01

Product type：Self-service kiosks
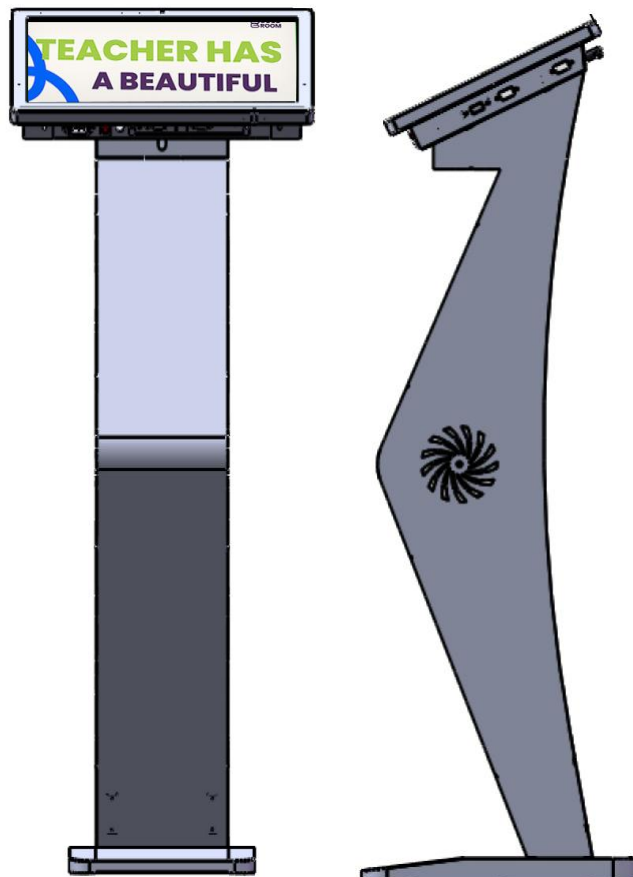
Checked by	Rechecked by	Approved by
Comments	Approved by	Company's seal
Customer's Name:		

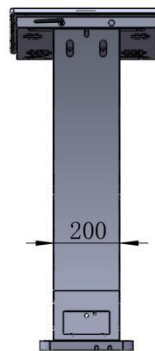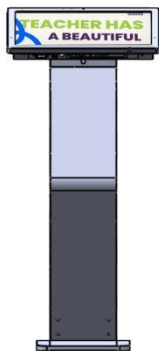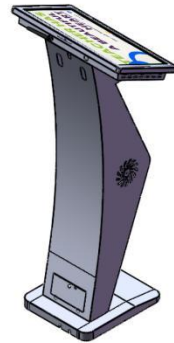Please send the original back to us after you have approved and signed.

Modify History

Ver.	Page	Revised Descriptions	Date	Revision	Approal
REV.1.0	ALL	T0	2025.06.16		

Product Paramenter:

Model	19"	Specifications	Units/Number	Notes
Screen Param-eters	Dimension	435.2（L)*348.2(V)*1028.11(H)	MM	
	Shell material	Black fine sand pattern (customizable)	-	
	Gross Weight	/	Kg/gross	
	Display Size	374.8(L×299.8(V)	MM	
	Display- resolution	1280*1024	Pixel	
	Brightness	400	Cd/m²	
	Contrast ratio	1000:1	-	
	Display scale	4:3	-	
	Viewing angle	89/89/89/89	-	
	Pixel pitch	0.2928×0.2928	MM	
	Display color	16.7	M	
Electrical	Maximum power	≤50	W	
	Standby power	≤1	W	
	Supply Voltage	5	V	
	Horn	8Ω3W*2	-	
WorkStorage	Operating temperature	0-50	℃	
	Working- humidity	10％～80％	%hr	
	Storage temperature	-20-50	℃	
	Storage Humidity	10％～80％	%hr	
	Power interface	AC 110-240V		

Model / 19"		Specifications	Units/Number	Notes
Functional configuration	**CPU**	RK3288, quad-core, 1.8GHz, Android 5.1.1		
	Operating System	Android 5.1.1		
	Memory Storage	Standard 2G (4G optional) / Standard 8G (16/32/64G optional)		
	built-inROM	2KB EEPROM (default not included, optional patch)		
	HDMI Out	1, supports 1080P@120Hz, 4kx2k@60Hz output		
	HDMI import	/		
	Support Video-Formats	Support wmv, avi, flv, rm, rmvb,mpeg,ts,mp4, etc		
	Support Image-Formats	Supports BMP, JPEG, PNG, GIF		
	Audio Input/Output	Supports left and right channel output, with built-in dual 4R/20W and 8R/10W power amplifiers		
	Headphone Output	Supports the insertion of one or two earphones		
	USB Interface	2 * USB HOST		
	Serial Port	/		
	Network Support	10/100M Adaptive Ethernet，Built-in WIFI, BT4.0，Built-in PCI-E interface 3G/4G, Internet access and call		
	Memory Card	Supports		
	RTC	Supports		
	System Upgrade	Support local SD, USB upgrade		

Product Rendering：

Product Dimension Drawing:

435.2

348.2

1028.11

907.76

25.84°

200

30

330

280

1. Unit: mm
2. Resolution: 1920* 1080
3. Brightness: 400 cd/ ㎡ (TYP)
4. Visual angle: 178 °
5. Storage temperature: -20 ° C~50 ° C Storage humidity: 10-80% RH
6. Working temperature: 0 ° C~50 ° C Working humidity: 10-80% RH
7. Input voltage: AC 110-240V

First perspective

General tolerance (unit: mm)	F	M	Model type	G190AWA80-S01	Version	A0	Material
0----200	±0.3	∨	Part Number		Page	1/1	18.5″complete machine
200--500	±0.5						
500--800	±0.7		Drawing No				
800--1200	±1.0						
1200--	±1.5		Design	To examine	Ratify	Date	