

SPECIFICATION

Product number: G37AY511-S01

Product type: Bus display



Checked by	Rechecked by	Approved by
Comments	Approved by	Company's seal
Customer's Name:		

Please send the original back to us after you have approved and signed.

Modify History


Ver.	Page	Revised Descriptions	Date	Revision	Approval
REV.1.0	ALL	T0	2025.05.16		

Product Parameter:

37"		Model	Specifications	Units/Number	Notes
	Dimension		918(L)*287.5(W)*50(H)	MM	
	Shell material		Black fine sand pattern	-	
	Gross Weight		11	Kg/gross	
Screen Parameters	Display Size		878.11(L)*247.61(V)	MM	
	Display- resolution		1920*551	Pixel	
	Brightness		350	Cd/m ²	
	Contrast ratio		5000: 1	-	
	Display scale		16:4.5	-	
	Viewing angle		89/89/89/89	-	
	Pixel pitch		0.4494*0.4494	MM	
	Display color		16.7	M	
Electrical	Maximum power		≤80	W	
	Standby power		≤1	W	
	Supply Voltage		12	V	
	Horn		5W/8 Ω*2	-	
WorkStorage	Operating temperature		0-50	℃	
	Working- humidity		10%~80%	%hr	
	Storage temperature		-20-50	℃	
	Storage Humidity		10%~80%	%hr	
Power interface			DC 24V 5A		

37" Model		Specifications	Units/Number	Notes
Functional configuration	CPU	TA40i, quad-core, the highest main frequency is 1.2GHz		
	Operating System	Android 7.1		
	Memory Storage	EMMC is standard with 8G (16/32G optional)		
	built-inROM	2KB EEPROM		
	HDMI Out	1, supports 1080P output		
	HDMI import	/		
	Support Video-Formats	Supports wmv, avi, flv, rm, rmvb, mpeg, ts, mp4, etc		
	Support Image-Formats	Supports BMP, JPEG, PNG, GIF		
	Audio Input/Output	Supports left and right channel output, with built-in dual 4R/20W and 8R/10W power amplifiers		
	Headphone Output	/		
	USB Interface	2 USB HOST, 3 USB ports		
	Serial Port	2 serial TTL sockets, 2 serial RS232 sockets		
	Network Support	4G, Ethernet, support WiFi/ Bluetooth 4.0, wireless peripheral expansion		
	Memory Card	Supports SD cards		
	RTC	Support multi-time timing on and off		
	System Upgrade	Support local SD, USB upgrade		

Product Rendering:

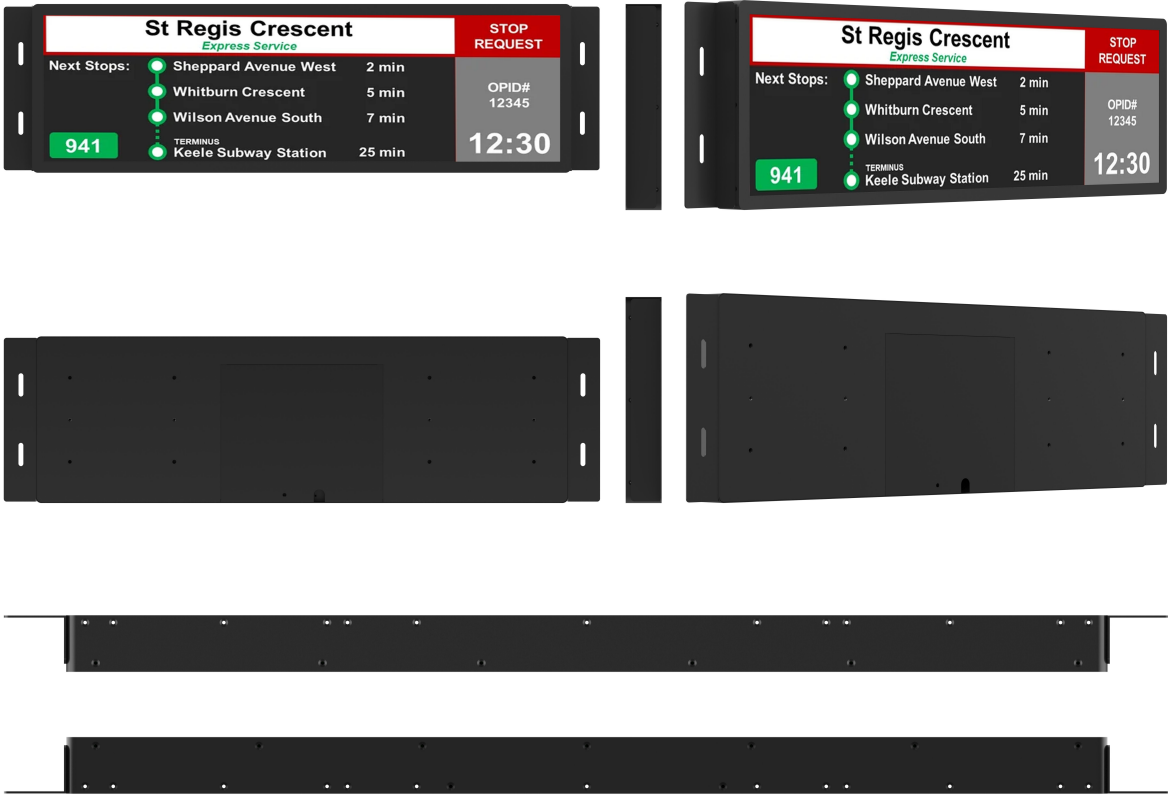

Product Dimension Drawing:

